




# Wire - 14/2 Maxi B/w Twisted & Red Jacketed 2500'

RG170800-2500

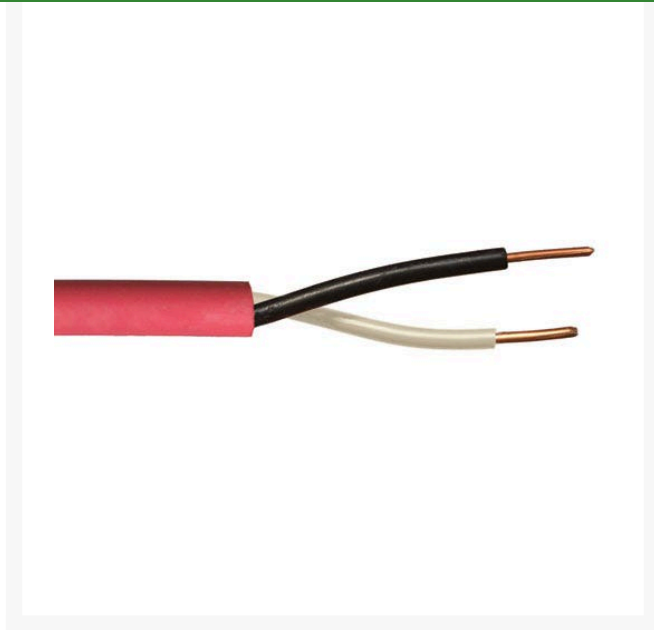

## Details

Compatible with TORO systems - This is a cable with 2 twisted wires, so that they stay together during the installation process and offer some opposition to electrical flow during lightning strikes. It includes a tough High Density Polyethylene red outer jacket for additional mechanical strength. The outer jacket is a loose tube that slides off easily when being removed and is available with several colors of stripes to facilitate circuit identification. This cable is specifically designed for the harsh conditions of landscape projects where chemicals such as fertilizers, herbicides, pesticides, and fungicides are frequently applied. Available in 14 AWG/2c construction. The decoder cable shall consist of 2 wires, twisted together. Its construction shall incorporate solid copper conductors with PE insulation. A loose tube-High Density Polyethylene jacket shall cover the twisted wires. The jacket color/stripes shall be such as to facilitate the identification of the various zones. The wires shall be UL® listed for direct burial in irrigation systems and be rated at a minimum of 600 VAC. Wire sizes are defined in the irrigation plans and other specifications. Paige Electric Co., LP specification number P7350

## Specifications

Manufacturer

Paige Electric

## TURF MACHINERY SPARES LTD

3a Monument Way West Woking, GU21 5EN  
01483 764467

<https://turfmachinery.rrproducts.com/>